


GEGA 600

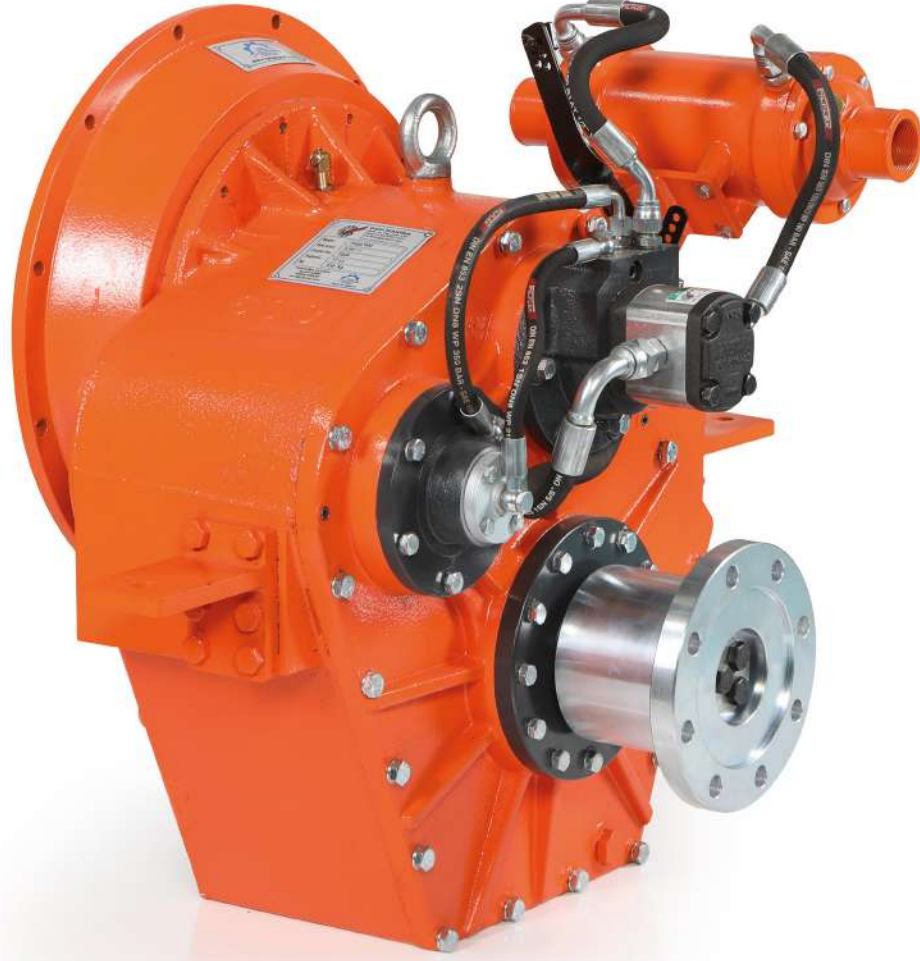

GEGA 600 Hidrolik Deniz Şanzımanı 250 HP (186 KW) ile 600 HP (447 KW) arasındaki motorlara akuple edilir.


GEGA 600 şanzımanında ileri kumandayı 'devamlı geri' olarak , geri kumandayı da 'devamlı ileri' olarak kullanabilirsiniz. Şanzımanında hiçbir arızaya sebep olmaz. Şanzıman seçimi yapılırken motor gücüne, redüksiyon oranına, teknenin yüklü ağırlığına bakılmalıdır.

GEGA 600 Hydraulic Maritime Transmission can be couple for all engines between 250 HP (186 KW) to 600 HP (447 KW). In GEGA 600 transmission, you may use its forward command as 'continuous reverse motion' and its reverse command as 'continuous forward'. These do not cause any breakdowns in transmission mechanism.

While you are choosing transmission mechanism, you have to know engine's power, reduction rate, the boats loaded weight.

HİDROLİK DENİZ ŞANZIMANI

HYDRAULIC MARITIME
TRANSMISSION MECHANISM

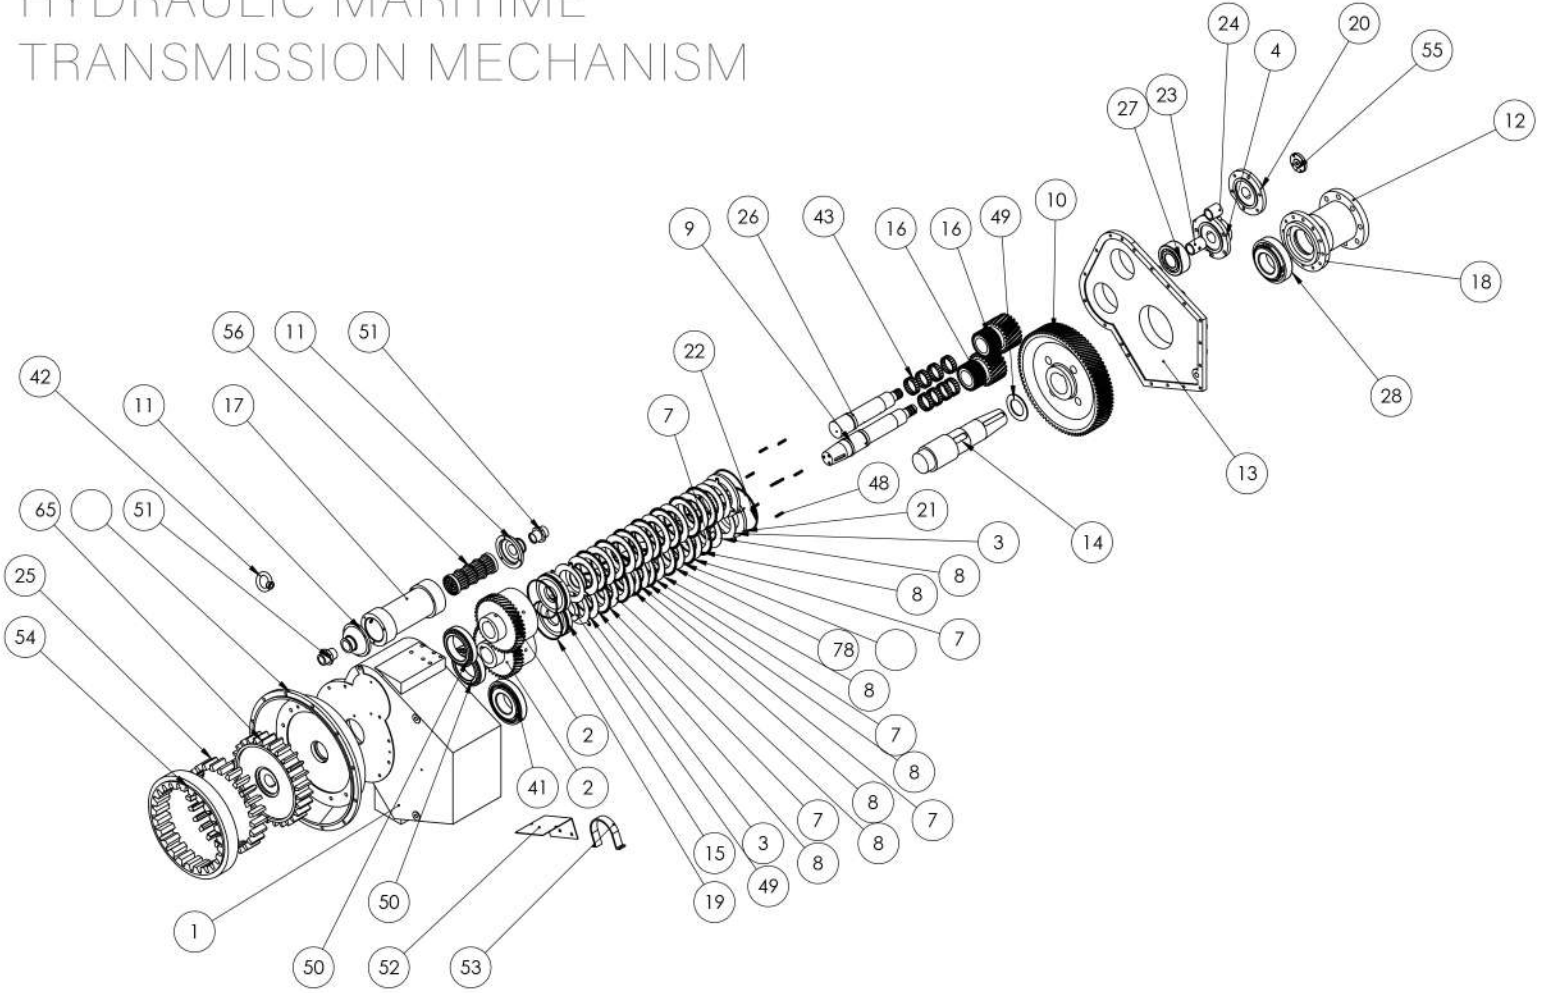

TEKNİK ÖZELLİKLER

TECHNICAL SPECIFICATIONS

Ağırlık / Weight: 438 kg.

Hidrolik Çalışma Basıncı / Hydraulic Working Pressure: 25-30 Atm.

Yağlama / Lubrication: 17 Lt.

YAĞ ÇEŞİTLERİ / OIL TYPES

Mobil	Mobilfluid 422
Shell	Tellus
Castrol	Agri powertrans
Shell	15/40

GEGA 600

Hafif Hizmet
Light Duty

Orta Hizmet
Medium Duty

Ağır Hizmet
Continious Duty

Devir
RPM

Redüksiyon Oranı
Reduction Rate

HP KW

HP KW

HP KW

Min Max

2/1	600	447	540	402,3	480	357,6	1600	2500
2,5/1	540	402,3	480	357,6	420	312,9	1600	2500
3,04/1	480	357,6	420	312,9	380	283,1	1600	2500
3,5/1	420	312,9	380	283,1	320	238,4	1600	2500
4/1	360	268,2	320	238,4	260	193,7	1600	2500